



Model:LDSW738ADB99GA

8MP Panoramic Dual Lens Smart light Two-way Audio IP Camera

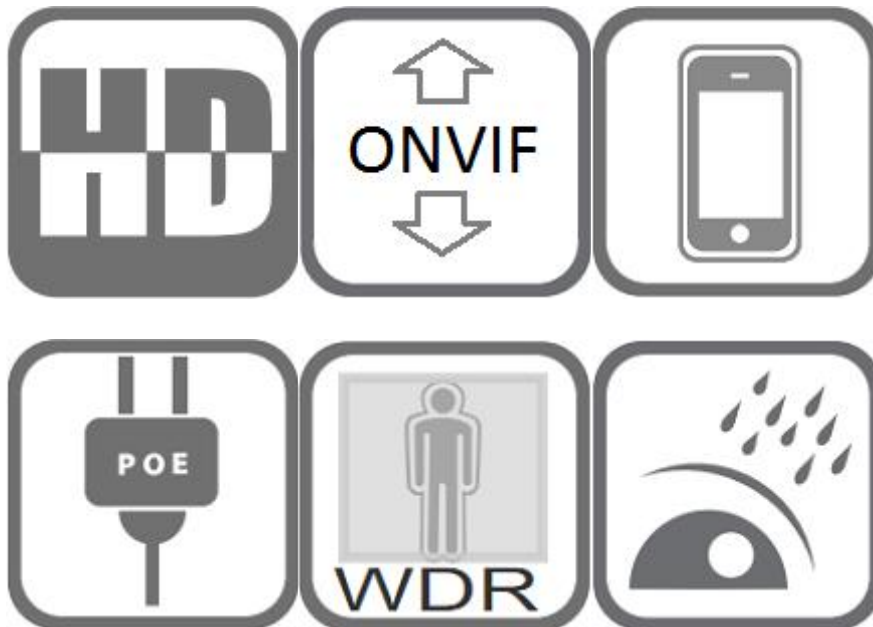

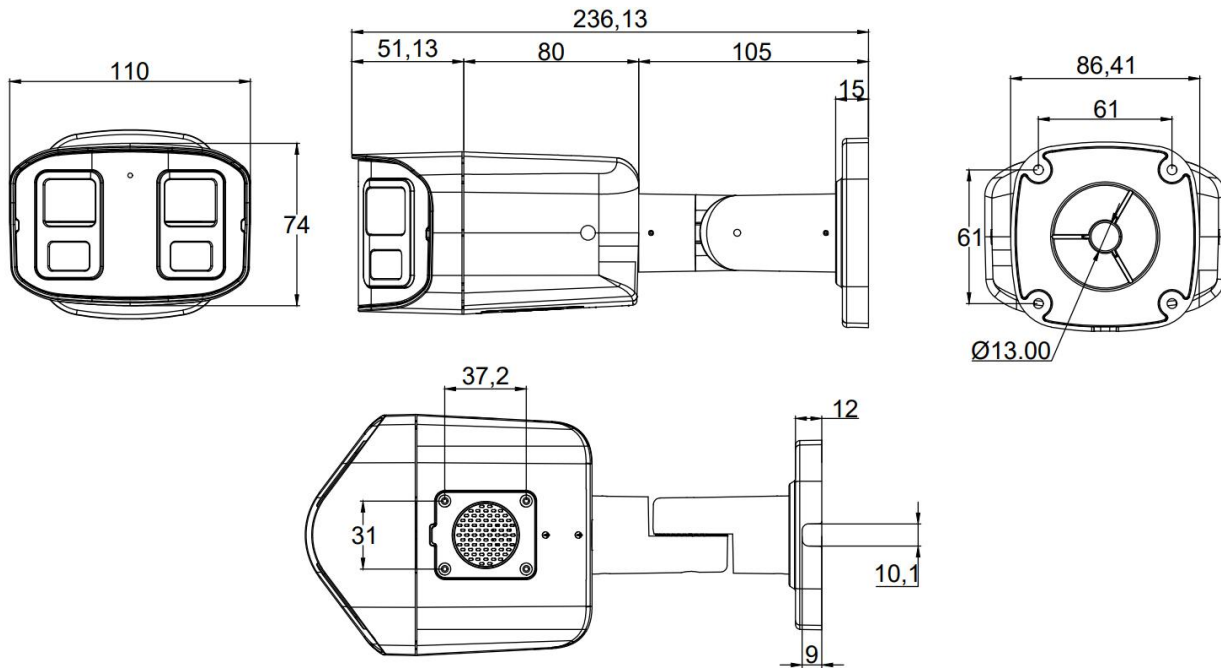

Features:

- 1/2.7" CMOS sensor
- 8MP wide-view resolution 4096 x 1944P (19:9)
- 180 °wide-angle
- Low illumination 0.01Lux
- Day/Night, AWB/MWB, BLC, HLC, 2D/3D-DNR, Shutter,
- D-WDR, Mirror , Defogging
- Multiply Style OSD Overlay, Motion Detection, Privacy Mask

- RTSP and Onvif 17.06 compatible with many third-party NVR
- H.264/H.265 dual-stream media server
- Easy-to-use P2P Cloud service
- Support user authentication, video data encryption
- Support Alarm Snapshot to Email and FTP
- Multiply WEB browser IE,Firefox 32bit ESR, Edge,Google Chrome,PC Client, Mobile APP remote access
- RJ45 100mbps network port, IEEE802.3af PoE
- Lightning protection 4000V
- Strong water-proof housing, IP66
- 2 pcs Warm light + 3 pcs IR Array leds,IR distance:25-30M,White light distance:25-30M,Three light Modes:
 Mode 1: Smart Dual Light
 Mode 2: Pure Infrared Light
 Mode 3: Pure White Light
- 2*F1.6 2.8 mm fixed lens
- Built-in Mic and speaker two-way audio
- With SD card slot ,support UP to 512GB SD card
- With reset button

Technical Specifications:

Model	LDSW738ADB99GA
Camera	
Image Sensor	1/2.7" GC5623 CMOS x2
Effective Pixels	8 megapixels
Electronic Shutter	AUTO, 1/25s ~ 1/100000s
Min. Illumination	0.01Lux@F1.2(AGC ON)
Day/Night	Auto/Color/(B/W)/Timing
WDR	Digital WDR
White Balance	Auto/Manual
BLC /HLC	Support
DNR	2D/3D DNR
Other	Human body and Vehicle detection ,AGC,Motion Detection,Privacy Mask,Flip ,OSD overlay
Encode	
Video Standard	H.264/H.265/H.265+
Video Resolution	MainStream:20fps@4096x1944P Sub stream: 20fps@1024x480
Video Bitrates	512Kbps - 8Mbps, VBR/CBR
Audio Standard	G.711-u/G.711-a/AAC
Built-in Mic	Yes

Built-in Speaker	Yes, Two-way audio
Smart Detection	Human body and Vehicle Detection
Led and distance	
Led	2pcs warm-light Led + 3pcs IR Array Led
IR Distance	20-30 M
White light Distance	20-30 M
Lens	
Focal length	2*F1.6 2.8 mm fixed lens
FOV	180°
Other Functions	
With SD card slot ,support UP to 512GB SD card,with reset button	
Network Services	
Protocol	HTTP/RTSP/FTP/SMTP/DHCP/NTP/NFS, etc.
P2P	Yes
Web	IE , Firefox,Edge, Google Chrome etc.
Media	CMS, Android, IOS
ONVIF	17.06 compatible
General	
Network Port	1-RJ45, 100Mbps, POE optional
Power Supply	12 VDC \pm 10%
Power Consumption	< 10 W
Operating Temp.	-30°C-(+60)°C, 10%-90%RH