

## Solar Construction Sites PTZ Cameras System


Model #: LDS4P4K30X (Hik-Connect App)



### Key Parameters:

- \*200W Solar Power System
- \* 2pcs 8MP SONY415 PTZ Camera
- \* 1T HIK VISION NVR System
- \* 30X Optical Zoom Lens

# Hik-Connect App & VMS

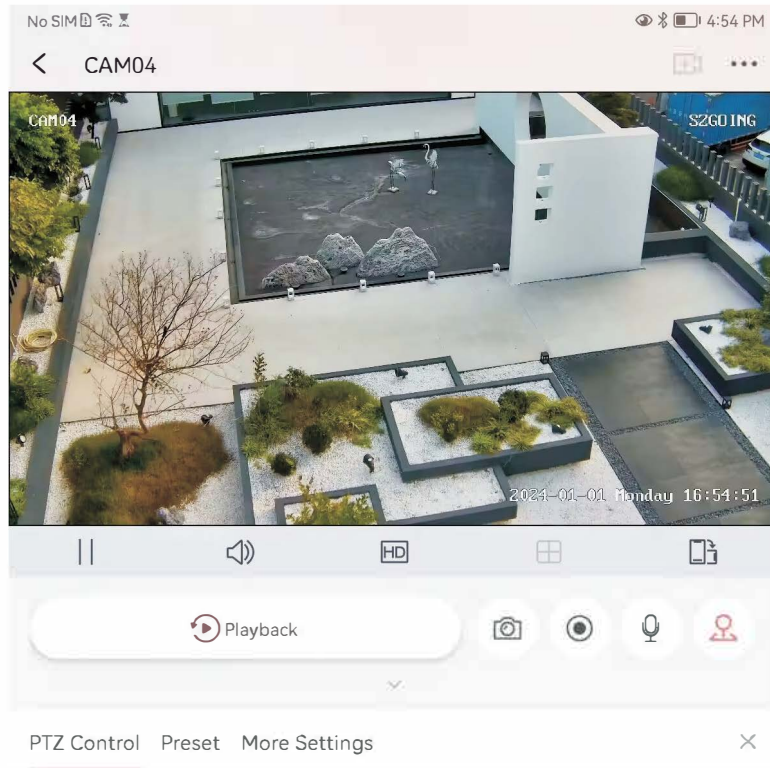

Home
Playback
Live View(1)
1 2
About
[-] [X]



File
SelectAll
Download
Split 4

Device Name	Channel Name	Record Type	Begin Time	End Time	Record Length	Operation
<input type="checkbox"/> A4P4K30X	D04	Regular	2023-03-15,11:20:50	2023-03-15,11:21:44	54Seconds 22.3MB	
<input type="checkbox"/> A4P4K30X	D04	MotionAlarm	2023-03-15,11:21:44	2023-03-15,11:21:59	15Seconds 5.1MB	
<input type="checkbox"/> A4P4K30X	D04	Regular	2023-03-15,11:21:59	2023-03-15,11:23:46	1Minutes 60.4MB	
<input type="checkbox"/> A4P4K30X	D04	MotionAlarm	2023-03-15,11:23:46	2023-03-15,11:24:00	14Seconds 6.4MB	
<input checked="" type="checkbox"/> A4P4K30X	D04	Regular	2023-03-15,11:24:00	2023-03-15,11:48:58	24Minutes 692.3MB	

# 4K 8MP Solar Construction Cameras System

---

**Model #: LDS200-A4P4K30X**

- \*It can work at anywhere without power and internet.
- \*It runs by solar power and support both 4G and WiFi network.
- \*200W solar power system,Aluminium alloy solar bracket
- \*2x 8MP PTZ camera 30X optical zoom.
- \*1000G memory for recording all the time or motion record.



# LDS4P4K30X Datasheet

Model #:	LDSA4P4K30X-1T
Compression	H.265+
Video Resolution	8MP
Supported Protocols	TCP, UDP, IP, HTTP, FTP, SMTP, DHCP, DNS, ARP, ICMP, POP3, NTP, IPsec, UPNP, RTP, RTCP
System Interface	10M/100M self-adapting Ethernet port
4G/3G/2GBand support	12DBI 4G/3G/2G antenna Europe/Asia/Africa:4G LTE-FDD:B1(2100)/B3(1800)/B7(2600)/B8(900)/B20(800),4G LTE-TDD:B38/B40/B41, 3G WCDPA :B1(2100)/B8(900),2G GSM:900/1800 America :4G,LTE-FDD:B1(2100),B2(1900),B4(1700),B12(700), B13(700),B17(700),3G WCDPA:B1(2100),B2(1900) Australia: FDD:B1(2100)/B3(1800)/B5(850)/B7(2600)/B8(900)/B20(800) ,Optional 700MHZ TDD:B38/B39/B40/B41 GSM(900M/1800M),EVDO(800M),TD_SDCMA(B34/B39)WCDPA:B1/B5/B8
WiFi network	802.11N/G/B,2.4G
Remote access way	P2P, Only need camera series ID and password, No need set DDNS
Memory	4000G Hard disk
Record mode	manual>alarm>motion detection>timing, By local HDD or NVR/PC
Camera system	8MP PTZ camera
Camera lens	30X Optical zoom: 3.2-96mm lens
IR Range	100M IR night vision
Solar system	100W X 2pcs Maximum Power(Pmax):100W,Voltage at Pmax(Vmp):18V Current at Pmax(Imp):5.56A, Open-Circuit Voltage(Voc):21.6V Short-Circuit Current(Isc):6.11A Size:970mm x 530mm x 30mm,Weight:5.6kg
Server box size	400x250x500mm
Power Control System	20A
Solar bracket	Aluminium alloy
Battery	Support Lead Acid battery, 18650 Li battery, Lifepo4 battery and others, Suggest LifePO4 12.8V Battery 50~100AH
Kit Weight	60KG